

Introduction

Thank you for purchasing Nordic Cab Baby Seat. This manual is for installation of Nordic Cab Baby seats only in a Nordic Cab Urban. Read the manual carefully. If you are unsure of the installation of your baby seat, contact your Nordic Cab dealer before using it.

Bruk

- For age between 0-9 months and under 9 kg.
- Can be used in Urban functions: Stroller, Jogger and Ski-Sled.

OBS!

Babyseat cannot be used when Cyckling.

Content:

Babyseat +

Velcro and buckle straps ("Female") x6 →




Velcro and buckle straps ("Male") x 6 →




1. Attach two female clips into the seat frame under the seat padding.



Detailed view of attachment point.

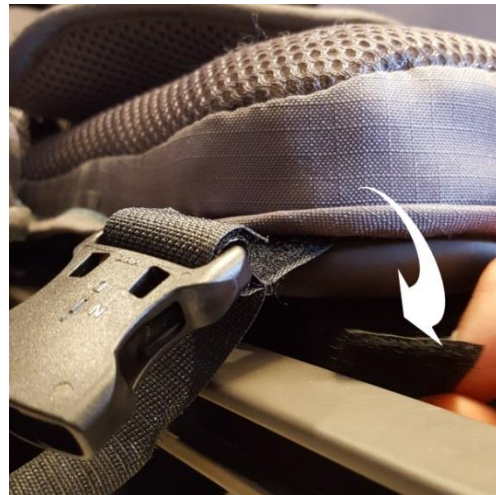

2. Attach a female clip on each side at the bottom of seat back frame, behind the seat padding.

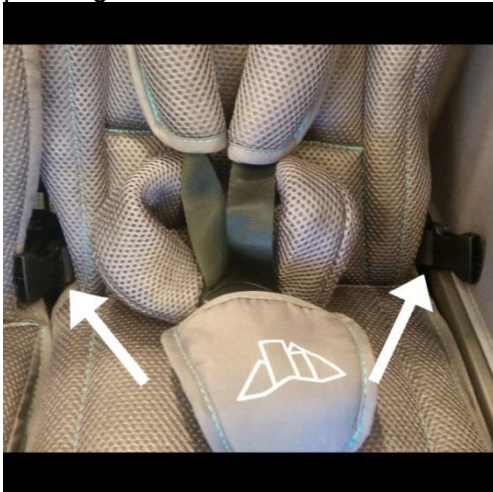

Detailed view of attachment point.



3. Attach a female clip to each side of the seat-back frame as far up as possible on the seat-back.



Detailed view of attachment point.



4. The safety harness is already mounted in the baby seat.


a) Remove the shoulder pads from Explorers safety belt. Fix the shoulder pads on baby's shoulder straps.

a)




b) Secure the shoulder straps to the safety lock. "Important"! Adjust the shoulder straps when the child is placed in the baby seat

b)

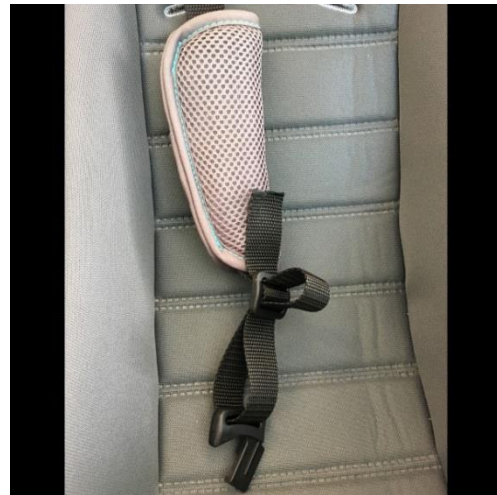

c) This is what the safety belt should look like when the shoulder pads are fitted correctly.

c)

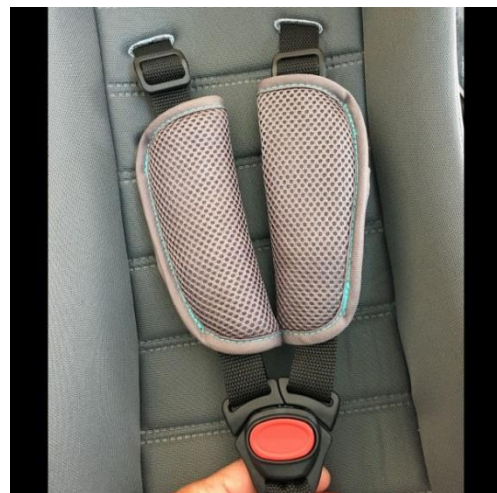

IMPORTANT!

- Make sure the child is securely fixed in the safety belt before using the trailer.

5. Assembly of Baby seat in trailer.

a) Remove the grey cover on the baby seat.
Attach 3 pairs of male clips through baby seat
the way you look at the picture a).

a)



b) Now you can fix baby seat into the carriage
with the clips. If you have trouble attaching
clips, you can adjust the length of the “male
“clip with the Velcro.

b)



IMPORTANT!

- Always ensure that the seat is secure and
fixed in the trolley before it is put into use.